


OPTICAL LEVELLING SWITCH

The horse-shoe shaped optical levelling switch provide noiseless sensing of slowdown and landing positions of the elevator

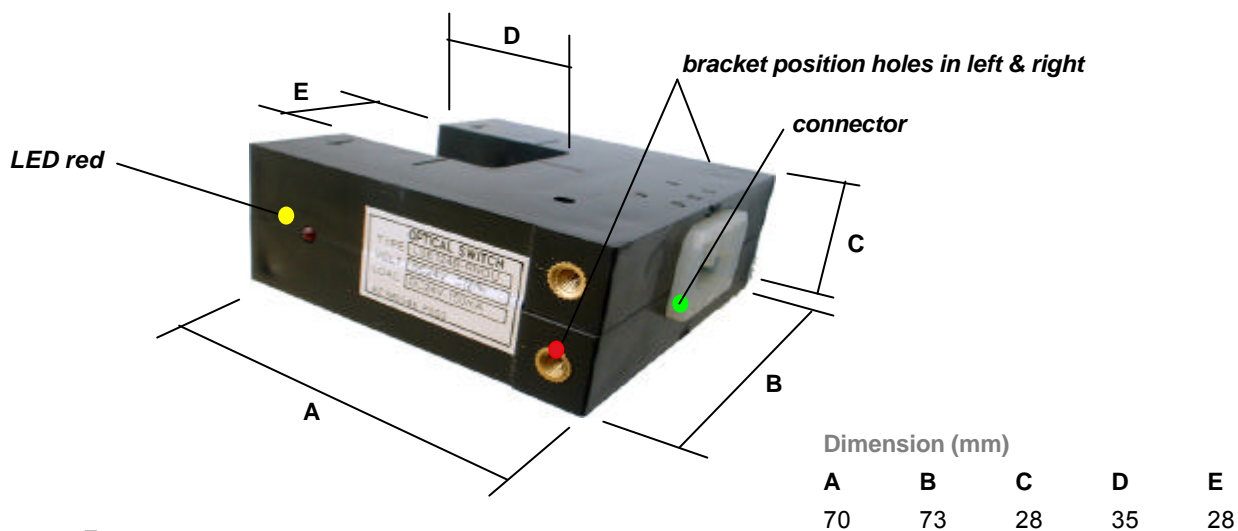


Features

24V DC single beams
pin cables length 500mm max.
plug-in housing type connector
mounting bracket available on both sides
color of lens : Red 24VDC

Ordering Codes

LA slot levelling switch with cable , NO with LED
LB slot levelling switch with cable , NC with LED

Circuit Diagram

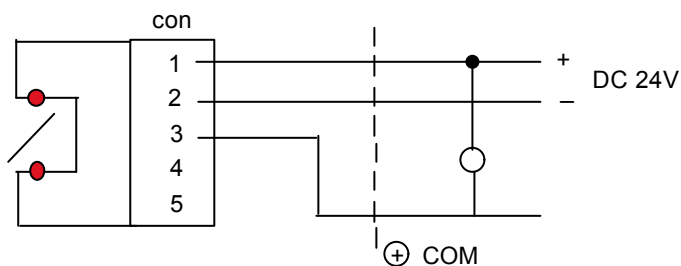

TYPE LSE 124B- RNOU
VOLT DC 24V- 10(%)
- 15
LOAC DC 24V- 150mA

EMERGENCY LIGHTING

NEW !!



1

Emergency lighting

Ideal for general elevator application

- **Housing:** Transparent Plastic Cased board and Separate fluorescent lamps, easily installed above or near car.
- **20kW at 90 min.:** JEM-100 emergency lighting battery provides 90 minutes of emergency power. It uses 20kW fluorescent lamps.
- **Maintenance-free:** Embedded Protection circuit prevents battery damage from deep discharge and over-charged and minimizes energy consumption.
- **Interphone:** Fully automatic call via interphone under emergency situation.
- [Optional] Chime connections: Allows external chime board with no needs of Chime bell. Embedded load weighing buzzer

| item # | Stock # | Description # |
|--------|---------|------------------|
| 1 | E001 | Fluorescent lamp |
| 2 | E002 | Main board |

2

