

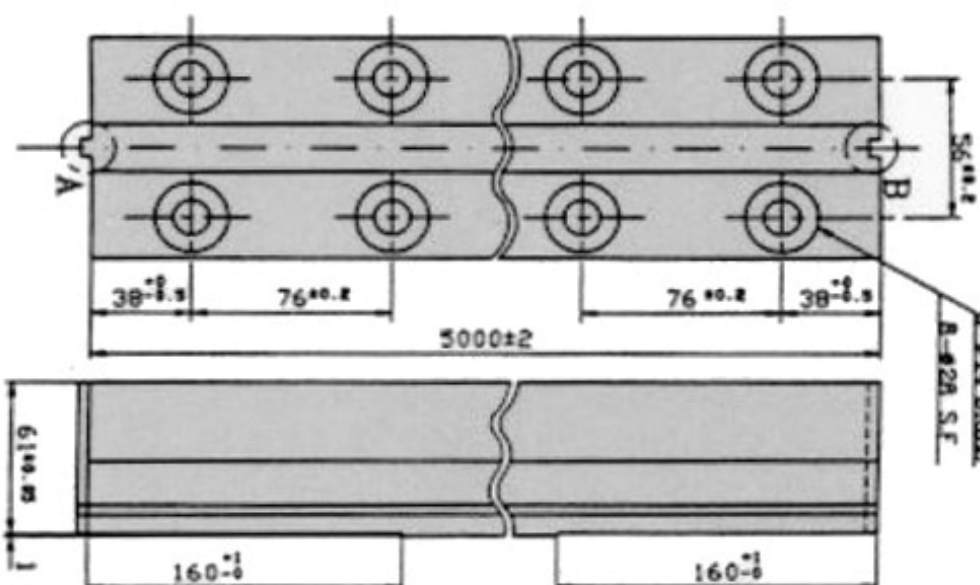


## 13K

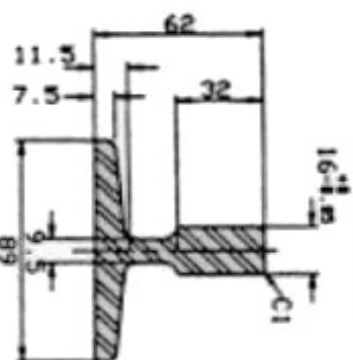


GUIDE	A	B	C
13KG	-3.97 -0.05	+3.97 -0.01	4 00.2





### DETAIL A

curde	D	E	F
13KG	4 +0.02	6 -0.04	4 +0.02



### DETAIL B

	13K
P	2.0
Q	2.0
R	0.4

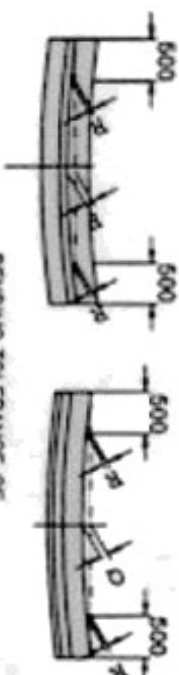BENDING TOLERANCE ON  
TOTAL LENGTH

### THE SIDE INCLINATION

—MEMO—

- PUT ON THE ANTI RUSTING OIL ON THE PROCESSING SURFACE.
- TOLERANCE (AFTER ASSEMBLING)  $\pm 0.02\text{mm}$
- FINISHING TOLERANCE OF TOTAL LENGTH  $\pm 0.2\text{mm}$


DRAWN	CHECKD	INSP	AFFR	TITLE	MAT	QTY	REMARK
				DATE 97-2-8	SPEC N/S		
						DRWING	KS1702

KEE SANG CORP.

KEE SANG CORP.