


ROLLER GUIDE SHOE

Wheel Dia . 150mm

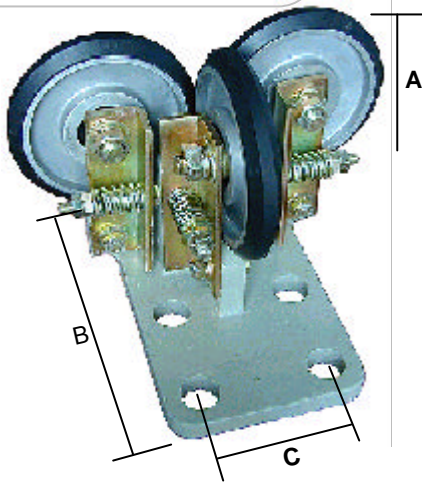

Specification

MODEL	CAR SPEED	BEARING
1071-150	1.75MPS	#6304dd

Dimension (mm)

A	B	C
150	187	100

Wheel Dia . 200mm

Specification

MODEL	CAR SPEED	BEARING
KGA01-200A	2~4 MPS	#6207zz

Dimension (mm)

A	B	C
200	187	100



For Elevator Car

Model 1071.130, 200A, 200B and 250 give optimum performance on high speed passenger elevator or heavy duty freight elevators.

As composed of 3 spring-loaded rollers, roller wheels in neoprene standard can minimize noise and vibrations in quite operation.

Each model has different application profile of guide rails. (For detailed dimension, ask us more)

Wheel Dia . 200mm

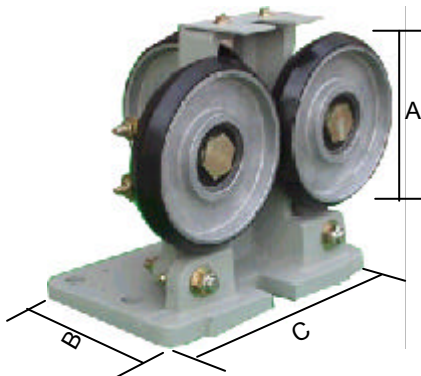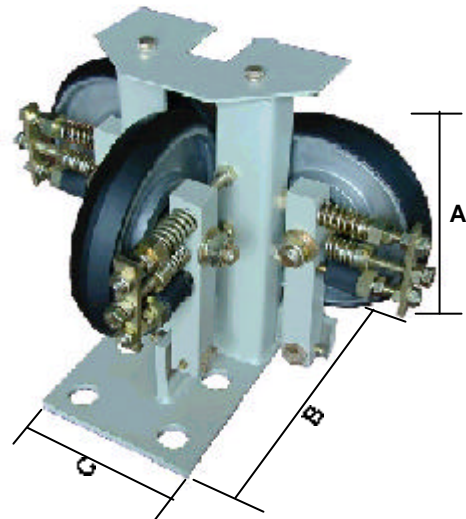

Specification

MODEL	CAR SPEED	BEARING
1071.200B	3.5 MPS	#6207zz

Dimension (mm)

A	B	C
200	162	282


Wheel Dia . 250mm

Specification

MODEL	CAR SPEED	BEARING
1071-250	4 MPS	#6207zz

Dimension (mm)

A	B	C
250	162	282

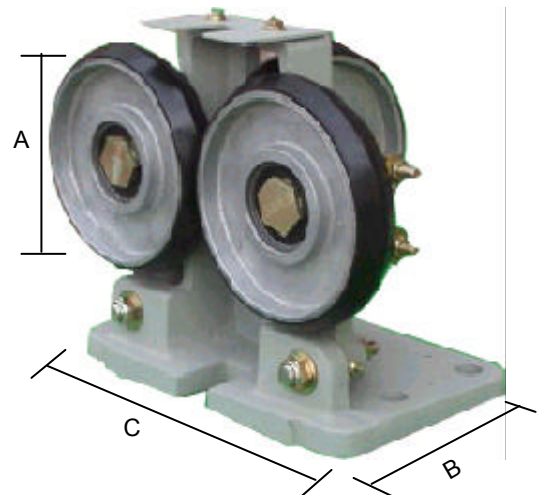

Call, Click or Stop By for easy access to thousands of parts!

keesang.co.kr

ROLLER GUIDE SHOE

For Both

Model **1071.130** can be used both for elevator cars and counterweights at different speed ranges.
It is used in speed up to 2.5 m/sec. for a elevator car and up to 8.0 m/s for a counterweight.

Specification

MODEL	CAR SPEED	CWT SPEED	BEARING
KGA01-130A	2.5 MPS	8MPS	#6304dd


Application Guide Rail

T78, T89, T114, T127


Dimension (mm)

A	B	C
130	140	120

Wheel Dia . 130mm

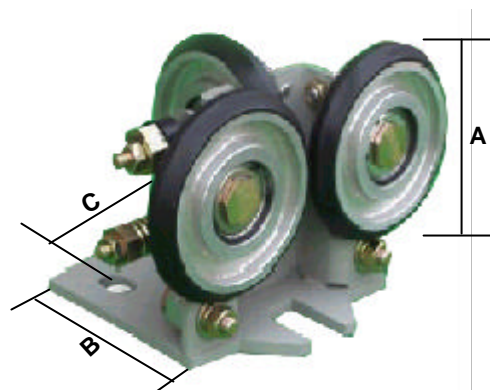

Wheel Dia . 90mm

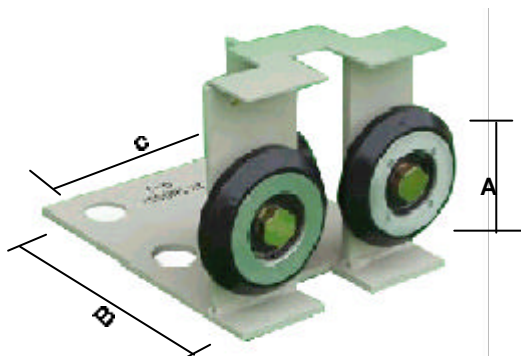

Application Guide Rail

T78, T89, T114, T127

Specification

MODEL	CWT SPEED	BEARING
KGA01-090A	8MPS	#6302dd

Dimension (mm)

A	B	C
90	189	100

Wheel Dia . 80mm

Application Guide Rail


T89, T114

Specification

MODEL	CWT SPEED	BEARING
KGA01-080A	1.75MPS	#6304zz

Dimension (mm)


A	B	C
80	80	40

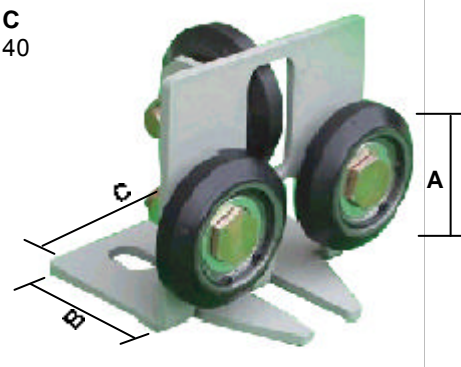

For Counterweight

Normally model **1071-78, 80 and 90** series are recommended to use only for counterweight.
For medium and high speeds for counterweights, smooth ride and saving power from reduction are secured specially by using roller wheels in neoprene as standard.
(For detailed dimension, ask us without hesitation).

Wheel Dia . 78mm

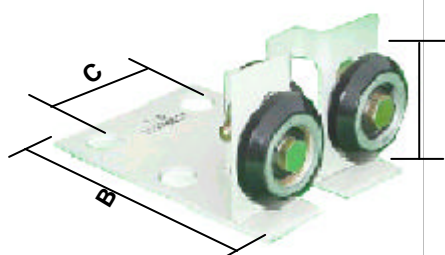

Application Guide Rail

T78, T89

Specification

MODEL	CWT SPEED	BEARING
KGA01-078A	1.75MPS	#6304zz

Dimension (mm)

A	B	C
78	160	100