


## DOOR SHOE

### Slide Up-down type

A door guide shoe, for vertically opening door where mainly used for freight elevator are used to move smoothly door in up-down direction and sliding. Various kinds will meet unique requirements.


No. 1041.01

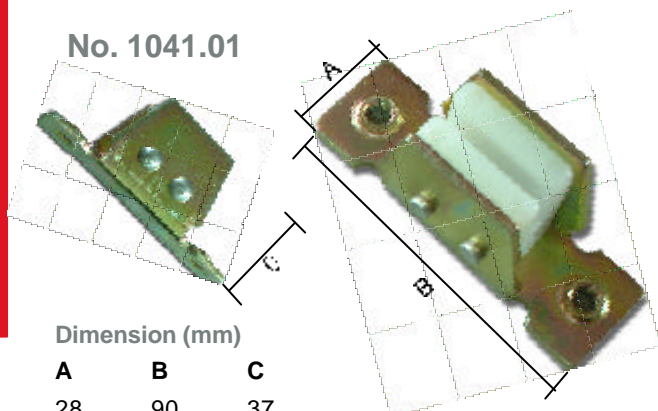

Dimension (mm)

A	B	C
28	90	37


No. 1041.03

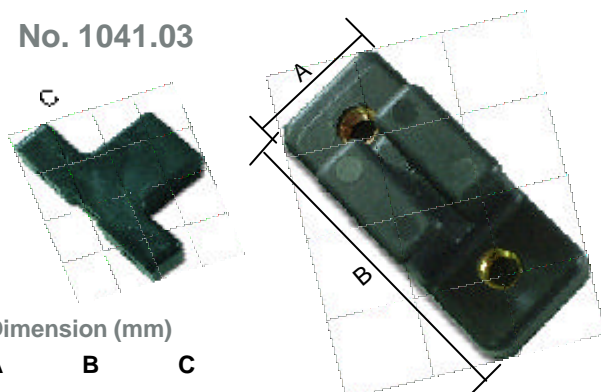

Dimension (mm)

A	B	C
30	72	42

No. 1041.05

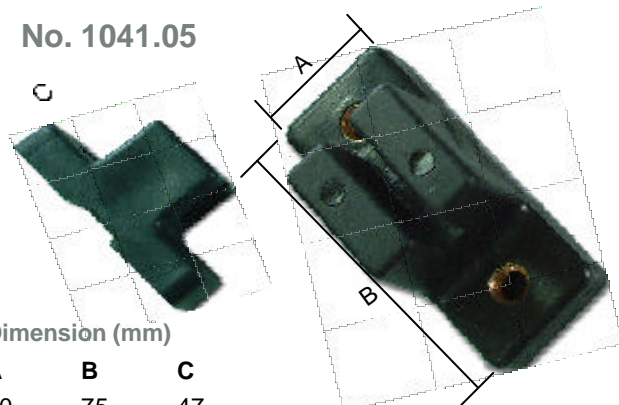


Dimension (mm)

A	B	C
30	75	47

### Horizontally Sliding door shoe

Model **1071.130** can be used both for elevator cars and counterweights at different speed ranges. It is used in speed up to 2.5 m/s for a elevator car and up to 8.0 m/s for a counterweight.

#### TOSHIBA MODEL

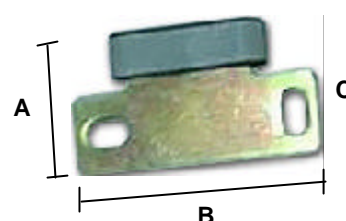


Dimension (mm)

A	B	C
35	66	11

No. 1041.02

#### MITSUBISHI MODEL




Dimension (mm)

A	B	C
37	60	13

No. 1041.04

#### HITACHI MODEL



Dimension (mm)

A	B	C
34	55	25

No. 1041.06