


TRANSFLOW BLOWERS



BLOWER WITH HOUSING, MOT OR

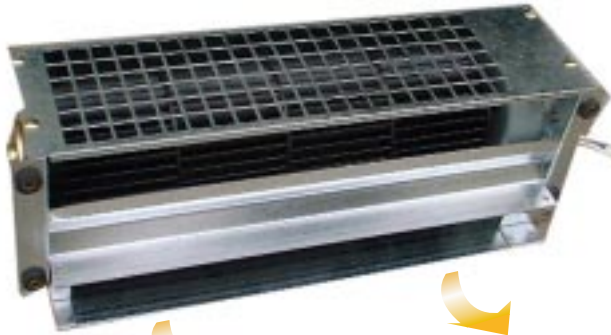

WHEEL & BUSHING

Description

Mount in top of elevator cab for quiet, efficient operation. C-frame motors have extra large sleeve bearings. 11' long with 18 gauge insulated 257jÆ(125jÆC) leads. Maximum ambient temperature is 104jÆF(40jÆC). Blowers have reinforced plastic housing and aluminum web construction.

All have Class B insulation, and components are certified in Korean Electric Standards. It has permanently lubricated ball bearings and is KS(Korean Standard) Recognized Components

Uses: Disperse a wide, uniform air pattern to ventilate, cool, or exhaust elevator cab, or cabinets, of fice

- Totally enclosed two speed 120V / 220V motor
- Compact design
- 15 "L x 5" H

Specification

Motor : 4 poles
Rated Voltage : free voltage, 110 / 220VAC
Rated Frequency : 50 / 60 Hz
Rated Amps : 0.34A / 0.17A
Speed : 1270/1400 rpm
Input : 36W
Wind Capacity : 6.0 m3/min

Stock No.

H7045

Price

USD 44.99

Drawing & Dimension

